


**3 1/2" PBL BYPASS SYSTEM
TECHNICAL SHEET**

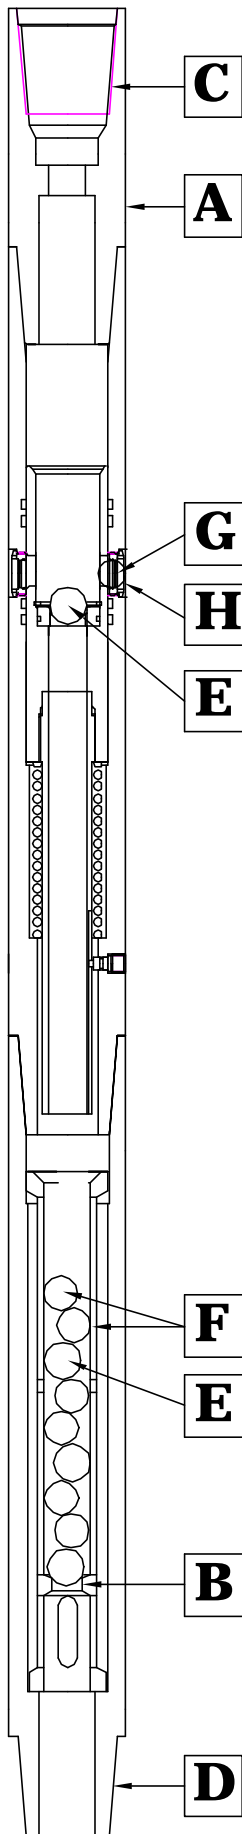

SERIAL #	_____	*
A-TOOL O.D.	_____	3.50"
B-TOOL I.D. (DRIFT)	_____	1.00"
FLOW AREA THROUGH TOOL	_____	1.07 sq/in
C-BOX CONNECTION	_____	2 3/8 IF
D-PIN CONNECTION	_____	2 3/8 IF
E-ACTIVATION BALL/# TO ACTIVATE:	_____	1
DIAMETER	_____	1.25"
MATERIAL	_____	Torlon
SHEARING PRESSURE	_____	As Desired
F-DEACTIVATION BALL/# TO DEACT.:	_____	2
DIAMETER	_____	1 1/16"
MATERIAL	_____	Steel
G-LOCKING BALL/# TO LOCK OPEN:	_____	NA
DIAMETER	_____	NA
MATERIAL	_____	NA
SHEARING PRESSURE	_____	NA
H-SIZE OF PORT	_____	0.867"
NUMBER OF PORTS	_____	2
TFA WHEN TOOL IS OPEN	_____	1.18 sq/in
NUMBER OF CYCLES	_____	3
OVERALL LENGTH	_____	5 - 6 ft
WEIGHT	_____	132 lbs
TENSILE STRENGTH	_____	490,000 lbs
TORSIONAL STRENGTH	_____	19,000 ft/lbs
MAKE UP TORQUE	_____	3,700 ft/lbs

NOTES:

NO DRIFT WHEN BALLS ARE IN TOOL.

* Tool is rated to operate in temp. up to 420 degrees Fahrenheit.

*

