




**6 3/4" O.D.**

**6 3/4" PBL SLIDING SLEEVE BIG BORE  
TECHNICAL SHEET**

<b>SERIAL #</b>	_____	*
<b>A-TOOL O.D.</b>	_____	<b>6 3/4"</b>
<b>B-TOOL I.D. (DRIFT)</b>	_____	<b>2.24"</b>
<b>FLOW AREA THROUGH TOOL</b>	_____	<b>3.94 sq./in.</b>
<b>C-BOX CONNECTION</b>	_____	<b>4 1/2 IF</b>
<b>D-PIN CONNECTION</b>	_____	<b>4 1/2 IF</b>
<b>E-ACTIVATION DART:</b>		
<b>DIAMETER</b>	_____	<b>2.28"</b>
<b>MATERIAL</b>	_____	<b>STAINLESS</b>
<b>NUMBER OF DARTS TO ACTIVATE</b>	_____	<b>1</b>
<b>BALL SHEARING PRESSURE</b>	_____	<b>NA</b>
<b>F-DEACTIVATION BALL:</b>		
<b>DIAMETER</b>	_____	<b>NA</b>
<b>MATERIAL</b>	_____	<b>NA</b>
<b>NUMBER OF BALLS TO DEACTIVATE</b>	_____	<b>NA</b>
<b>G-SIZE OF PORT</b>	_____	<b>1.25"</b>
<b>NUMBER OF PORTS</b>	_____	<b>2</b>
<b>TFA WHEN TOOL IS OPEN</b>	_____	<b>2.454 sq./in.</b>
<b>NUMBER OF CYCLES</b>	_____	<b>UNLIMITED</b>
<b>OVERALL LENGTH</b>	_____	<b>5 ft</b>
<b>WEIGHT</b>	_____	<b>390 lbs</b>
<b>TENSILE STRENGTH</b>	_____	<b>3,100,000 lbs</b>
<b>TORSIONAL STRENGTH</b>	_____	<b>190,000 ft/lbs</b>
<b>MAKE UP TORQUE</b>	_____	<b>34,840 ft/lbs</b>

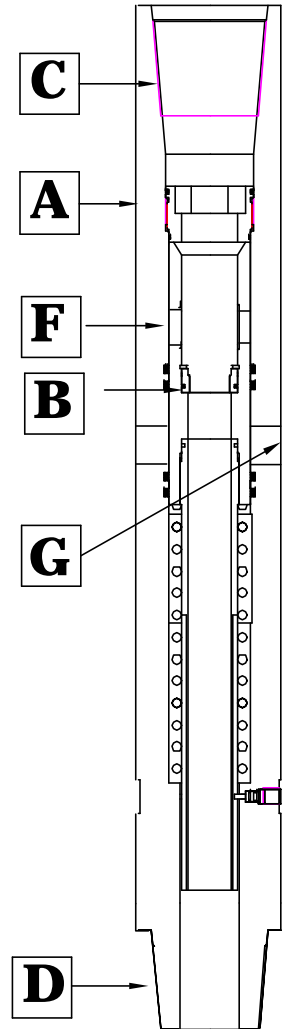

**NOTES:**

**NO DRIFT WHEN DART IS IN TOOL.**

**\*Tools are rated to operate in temp. up to 420 degrees Fahrenheit.**

\*

\*