

### General Dimensional Data

Motor: B5 Transmission: Flex Shaft

A - Bit to Center of Stabilizer Blade	50.3 in (1279 mm)
B - Bit to Bend	120.1 in (3051 mm)
C - Overall Motor Length	39.0 ft (11.9 m)
D - Max OD of Motor at Stabilizer Upset	11 in (279.4 mm)
E - Radius at Kickpad	5.3 in (134.6 mm)
Common Top Connection	6-5/8 or 7-5/8 REG
Common Bottom Connection	6-5/8 or 7-5/8 REG
Recommended Bit Sizes	12-1/4 in to 17-1/2 in (311.2 - 444.5 mm)
Estimated Weight	6600 lbs (2994 kg)

### Motor Loads

	Continuous Operation	Ultimate Loading
WOB - lbs (kg)	127,000 (57,600)	-
Backreaming - lbs (kg)	58,000 (26,300)	-
Bit Overpull* - lbs (kg)	288,000 (130,600)	1,506,000 (683,000)
Body Overpull* - lbs (kg)	1,062,000 (481,720)	2,295,000 (1,040,990)

#### \*While Not Operating

Continuous Loads - Lay motor down if exceeded  
 Ultimate Loads - Motor may part if exceeded

### Power Section Specifications

Lobes: 7/8

Flow Range	400 - 900 gpm (1,514 - 3,407 lpm)	Max Recommended Pressure	1,000 psi (68.9 bar)
Speed Ratio	.16 rev/gal (.042 rev/l)	Torque Slope	16.54 ft-lb/psi (325.25 Nm/bar)
No Load Bit Speed	64 - 144 rpm	Torque @ Max Recommended Pressure	16,540 ft-lbs (22,425 Nm)
No Load Pressure Drop	500 psi (34.47 bar)	Power @ Max Recommended Pressure	384 hp (287 kW)


### Predicted Build Rates

Degrees / 100 ft (30 m)

Bend Angle	Slick Motor Hole Size (in)			Stabilized 1/8" UG Hole Size (in)			Stabilized 1/4" UG Hole Size (in)		
	12-1/4	14-3/4	17-1/2	12-1/4	14-3/4	17-1/2	12-1/4	14-3/4	17-1/2
.78	-	-	-	3.6	4.4	5.3	3.3	4.1	5.0
1.15	3.1	-	-	5.3	5.9	6.8	5.1	5.6	6.5
1.50	4.7	2.2	-	7.2	7.3	8.2	7.0	7.0	7.9
1.83	6.3	3.7	-	9.1	8.6	9.5	8.8	8.3	9.2
2.12	7.7	5.1	2.3	10.7	9.8	10.6	10.4	9.6	10.3

\*This condensed Build Rate table is the result of a theoretical geometry analysis of the motor and is presented as guideline for job design and planning. Due to the extensive variability in drilling BHA design, formation characteristics and other external factors, BICO cannot guarantee the values stated in the Build Rate table.

### Performance Curve

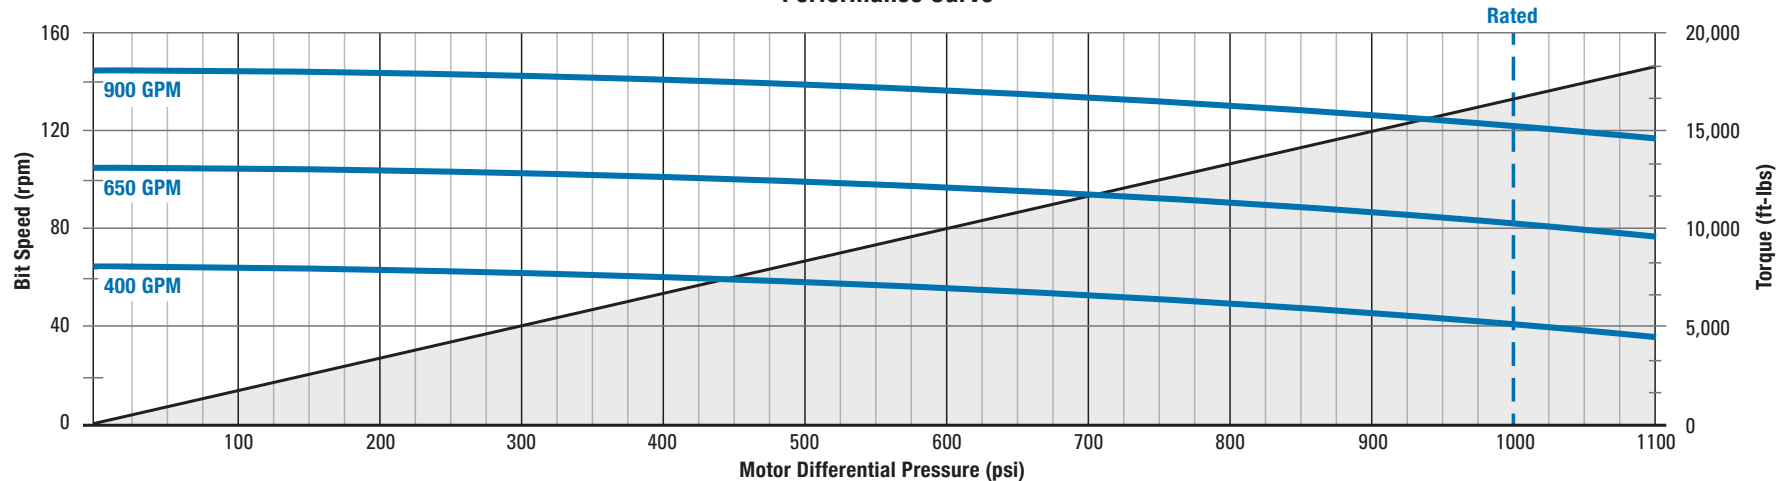

Disclaimer: The Performance Curve and Performance Data published by BICO Drilling Tools are based on recorded dynamometer data at surface temperature (72 degF) on a standard fit configuration between rotor and stator, with clean water, and are presented as a reference to the potential power of the power section and or motor. Downhole conditions such as highly elevated bottom hole temperatures and different drilling/intervention fluids shall require adjusted loose fits that may produce reduced power during surface (dynamometer) testing and will achieve the expected torque and speed values when reaching planned conditions. Contact BICO for the adjusted performance curves.